

Feedback Product Data Sheet



Open
to your
world

Extension Cable. XC-M2...S-M1




- Intermediate extension cable for DRIVE-CLiQ applications with Siemens Solution Line systems.
- To connect between FAGOR DRIVE-CLiQ adapters EC-PA-DQ1-M, EC-PA-DQS-M or XC-C8-PA-DQ-M-N and XC-M2-S-RJ... extension cables.
- Small M12 8 ways male connector, it helps the installation, routing and lay-out of the extension cable.
- Available in 5, 10, 15, 20 & 25 meter lengths.
- Twisted pairs for differential signals.
- Low power attenuation.

Pin Out


Pin Input	Colour	Signal	Pin Output
3	Pink	RXP	3
4	Blue	RXN	4
7	Green	TXP	7
6	Yellow	TXN	6
1	Red	Vcc (24 V)	1
5	Black	0 V	5
Housing	Shield	Ground	Housing

Pin Layout




Front view

Cable Diagram

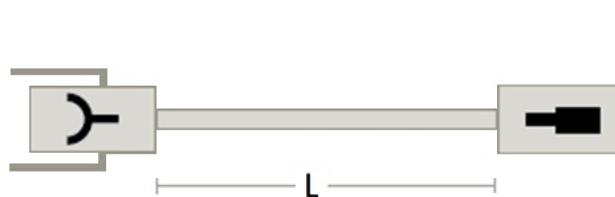

L = 5, 10, 15, 20, 25 meters

Pin Layout




Front view

Feedback Product Data Sheet

FAGOR
AUTOMATION

Open
to your
world


Lead-in Connector

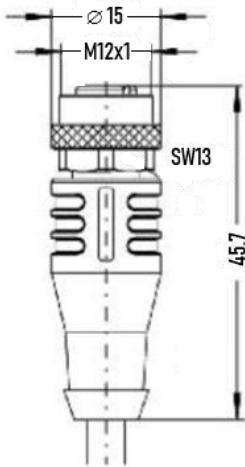

Cable Specification

Construction	2 x (2 x 0.20 mm ²) + (2 x 0.38 mm ²)
Material	Polyurethane
Ø	7.5 mm
Bend radius dynamic	≥ 45 mm
Bend radius static	≥ 30 mm
Shield	Single
Lead-in connector (encoder side)	M12 8-pin female
Terminating connector	M12 8-pin male

Terminating Connector

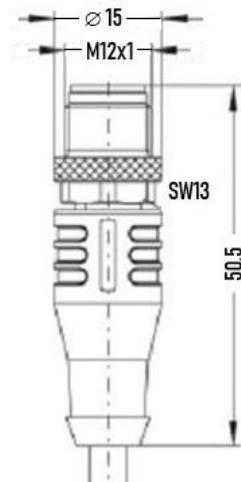

Order Information

XC-M2-(x)S-M1 Where (x) = 5, 10, 15, 20 or 25 meters.

Example

Order Code	Description
XC-M2-10S-M1	Intermediate extension cable of 10 meters, specifications as above, lead-in connector M12 8-pin female and M12 8-pin male terminating connector.